


## Features

- \* Small surface mounting type
- \* Ultra low  $V_F$
- \* High reliability
- \* High frequency rectification switching regulation
- \* Marking Code: "SA"



RoHS  
COMPLIANT

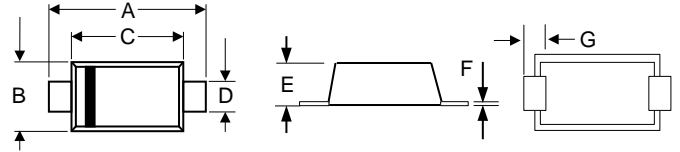

SOD-323F				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.091	0.110	2.30	2.80
B	0.045	0.053	1.15	1.35
C	0.063	0.071	1.60	1.80
D	0.010	0.016	0.25	0.40
E	0.031	0.043	0.80	1.10
F	0.004	0.006	0.10	0.15
G	0.016	0.024	0.41	0.61

## Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	30	V
DC Reverse Voltage	$V_R$	20	V
Mean Rectifying Current	$I_o$	0.5	A
Peak Forward Surge Current (60 Hz for 1 Cyc.)	$I_{FSM}$	2	A
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 40 to + 125	$^\circ\text{C}$

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Max.	Unit
Forward Voltage at I <sub>F</sub> = 100 mA at I <sub>F</sub> = 500 mA	V <sub>F</sub>	0.36 0.47	V
Reverse Current at V <sub>R</sub> = 20 V	I <sub>R</sub>	100	μA

Note: ESD sensitive product handling required.

### Ratings and Characteristic Curves

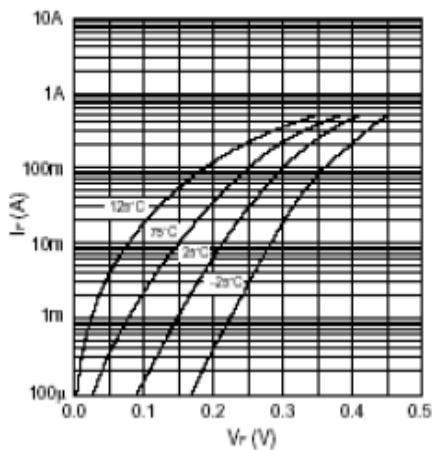


Fig.1 Forward characteristics

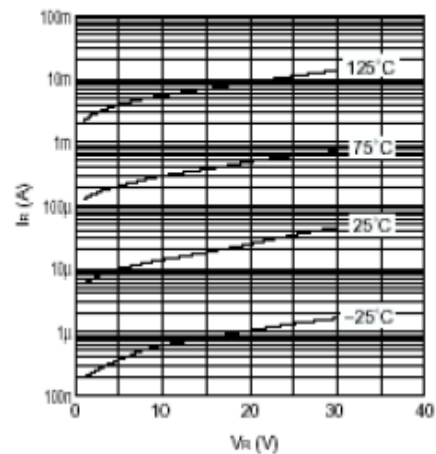


Fig.2 Reverse characteristics

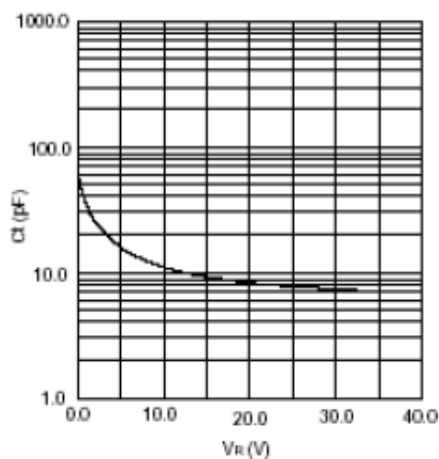


Fig.3 Capacitance between terminals characteristics

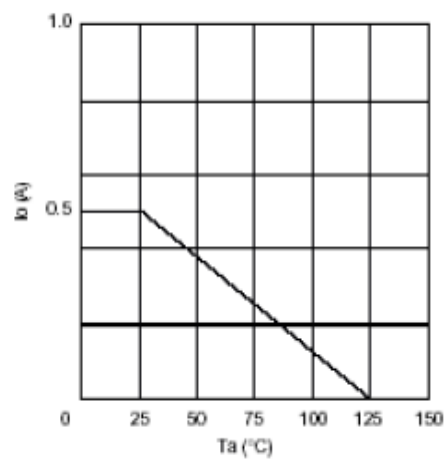


Fig.4 Derating curve



**RB551V-30**  
*Silicon Epitaxial Planar Schottky Barrier Diode*

---

**Ordering Information**

---

<b>Part No.</b>	<b>Package</b>	<b>Packing Code</b>	<b>Packing</b>
RB551V-30	SOD-323F	R30	3000pcs/Reel

**Disclaimer**

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.