


Features

- * Small surface mounting type
- * Low reverse current and low forward voltage
- * High reliability
- * For high speed switching and detection applications
- * Marking Code: "D"



RoHS
COMPLIANT

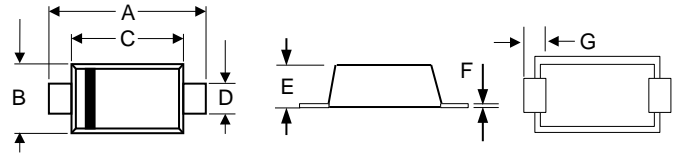

SOD-523F				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.50	1.70
B	0.030	0.033	0.75	0.85
C	0.045	0.049	1.15	1.25
D	0.012	0.016	0.30	0.40
E	0.024	0.028	0.60	0.70
F	0.004	0.005	0.10	0.14

Maximum Ratings (T_A=25°C unless otherwise noted)


Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V _{RM}	40	V
Reverse Voltage	V _R	30	V
Mean Rectifying Current	I _O	30	mA
Peak Forward Surge Current (60 Hz, 1 Cycle)	I _{FSM}	200	mA
Junction Temperature	T _j	125	°C
Storage Temperature Range	T _{stg}	- 40 to + 125	°C

Electrical Characteristics (T_A=25°C unless otherwise noted)


Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at I _F = 1 mA	V _F	-	0.37	V
Reverse Current at V _R = 30 V	I _R	-	0.5	μA
Capacitance Between Terminals at V _R = 1 V, f = 1 MHz	C _T	2	-	pF

Note: ESD sensitive product handling required.


Ratings and Characteristic Curves

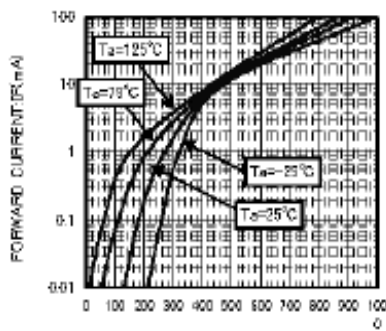


FORWARD VOLTAGE: V_F(mV)
VF-IF CHARACTERISTICS
VF分布

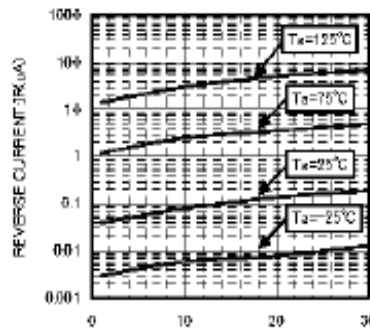


REVERSE VOLTAGE: V_R(V)
VR-IR CHARACTERISTICS

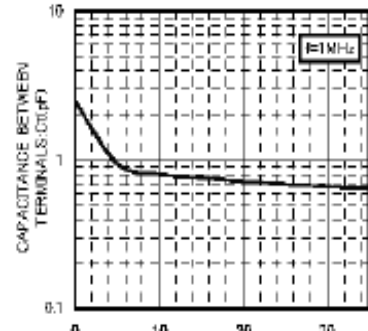


REVERSE VOLTAGE: V_R(V)
VR-C_T CHARACTERISTICS

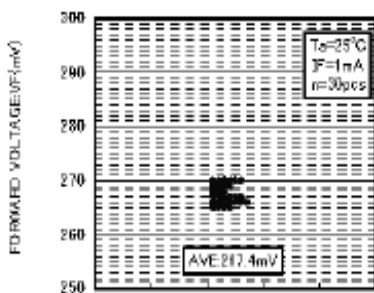

VF DISPERSION MAP




IR DISPERSION MAP

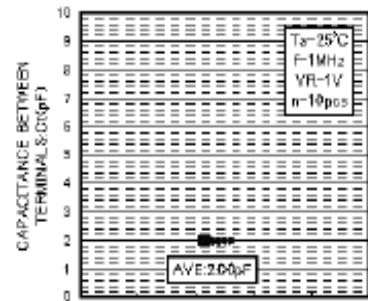


C_T DISPERSION MAP


Ratings and Characteristic Curves

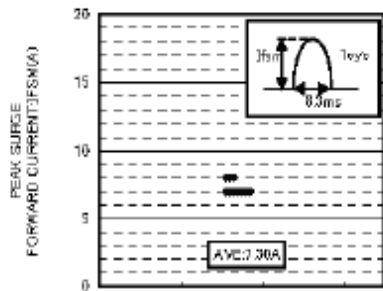


IFSM DISPERSION MAP

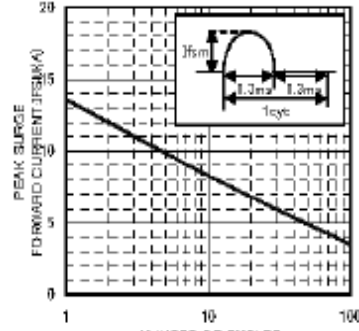


NUMBER OF CYCLES
IFSM-CYCLE CHARACTERISTICS

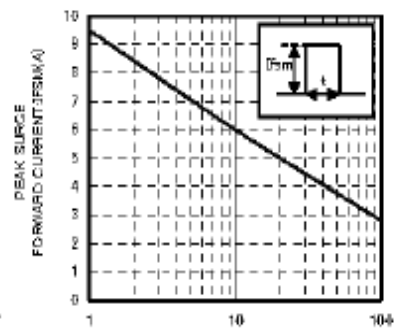


TIME (ms)
IFSM-t CHARACTERISTICS

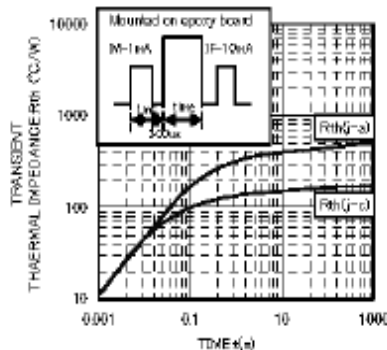


TIME (s)
Rth-t CHARACTERISTICS

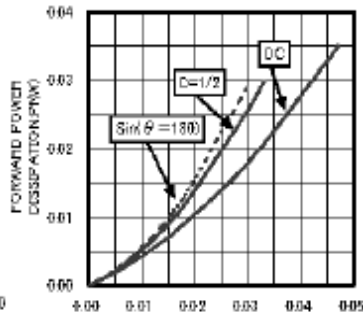


AVERAGE RECTIFIED
FORWARD CURRENT I_F (A)
IF-PF CHARACTERISTICS

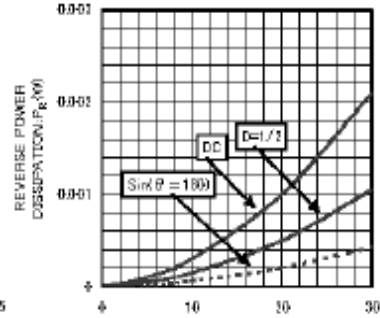

REVERSE VOLTAGE V_R (V)
VR-P_c CHARACTERISTICS

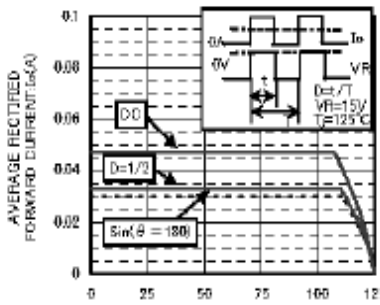

AMBIENT TEMPERATURE T_a (°C)
Derating Curve (I_a - T_a)

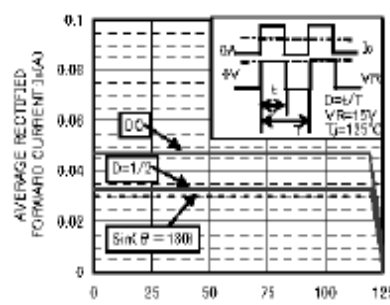

CASE TEMPERATURE T_c (°C)
Derating Curve (I_a - T_c)



RB751S-40

Silicon Epitaxial Planar Schottky Barrier Diode

Ordering Information

Part No.	Package	Packing Code	Packing
RB751S-40	SOD-523F	R30	3000pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.