


Features

- * 15000 watts peak pulse power capability on 10/1000us waveform
- * Glass passivated junction and plastic package devices
- * Low incremental surge resistance
- * High temperature soldering guaranteed
- * Fast response time: typically less than 1.0ps from 0 Volts to BV, bidirectional less than 10ns



RoHS
COMPLIANT

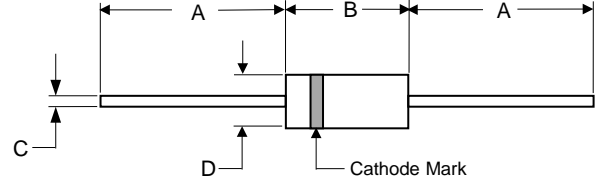

P600				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1.000	---	25.40	---
B	0.339	0.358	8.60	9.10
C	0.047	0.051	1.20	1.30
D	0.339	0.358	8.60	9.10

Mechanical Data

- * Polarity: Color band denotes cathode except bipolar
- * Weight: 0.07 ounce, 2.5 grams
- * Terminals: plated Axial leads, solderable per MIL-STD-750, Methode 2026
- * Epoxy meets UL 94 V-0 flammability rating
- * Moisture Sensitivity Level 1
- * Operating Temperature: -55°C to +175°C
- * Storage Temperature: -55°C to +175°C

Electrical Characteristics (T_A=25°C unless otherwise noted)

PART NUMBER		REVERSE STAND- OFF VOLTAGE V _{RWM}	BREAKDOWN VOLTAGE V _{BR} MIN. @I _T	BREAKDOWN VOLTAGE V _{BR} MAX. @I _T	TEST CURRENT I _T (mA)	PEAK PULSE CURRENT I _{pp}	MAXIMUM REVERSE LEAKAGE I _r @ V _{RWM}	CLAMPING VOLTAGE V _c @I _{PP}
UNI-POLAR	BI-POLAR	V	V	V	mA	A	μ A	V
15KP17A	15KP17CA	17	18.9	20.79	50	512	5000	29.3
15KP18A	15KP18CA	18	20	22.01	50	485	5000	30.9
15KP20A	15KP20CA	20	22.2	24.46	20	437	1500	34.3
15KP22A	15KP22CA	22	24.4	26.91	10	404	500	37.1
15KP24A	15KP24CA	24	26.7	29.35	5	369	150	40.5
15KP26A	15KP26CA	26	28.9	31.8	5	347	50	44
15KP28A	15KP28CA	28	31.1	34.24	5	316	25	47.5
15KP30A	15KP30CA	30	33.3	36.69	5	296	15	50.7
15KP33A	15KP33CA	33	36.7	40.4	5	274	10	54.8
15KP36A	15KP36CA	36	40	44	5	251	10	59.7
15KP40A	15KP40CA	40	44.4	48.9	5	228	10	65.8
15KP43A	15KP43CA	43	47.8	52.6	5	215	10	69.7
15KP45A	15KP45CA	45	50	55	5	205	10	73
15KP48A	15KP48CA	48	53.3	58.7	5	193	10	77.7
15KP51A	15KP51CA	51	56.7	62.4	5	181	10	82.8
15KP54A	15KP54CA	54	60	66	5	171	10	87.5
15KP58A	15KP58CA	58	64.4	70.9	5	160	10	94
15KP60A	15KP60CA	60	66.7	73.4	5	154	10	97.3
15KP64A	15KP64CA	64	71.1	78.3	5	144	10	104
15KP70A	15KP70CA	70	77.8	85.6	5	132	10	114
15KP75A	15KP75CA	75	83.3	91.7	5	123	10	122
15KP78A	15KP78CA	78	86.7	95.4	5	119	10	126
15KP85A	15KP85CA	85	94.4	104	5	109	10	137
15KP90A	15KP90CA	90	100	110.1	5	103	10	146
15KP100A	15KP100CA	100	111	122.3	5	93	10	162
15KP110A	15KP110CA	110	122	134.5	5	84	10	178
15KP120A	15KP120CA	120	133	146.8	5	78	10	193
15KP130A	15KP130CA	130	144	159	5	72	10	209
15KP150A	15KP150CA	150	167	183.5	5	62	10	243
15KP160A	15KP160CA	160	178	195.7	5	58	10	259
15KP170A	15KP170CA	170	189	207.9	5	55	10	275
15KP180A	15KP180CA	180	200	220.1	5	52	10	291
15KP200A	15KP200CA	200	222	244.6	5	47	10	322
15KP220A	15KP220CA	220	245	269.1	5	42	10	356
15KP240A	15KP240CA	240	267	293.5	5	39	10	388
15KP260A	15KP260CA	260	289	318	5	36	10	419
15KP280A	15KP280CA	280	311	342.4	5	33	10	452

Note:

1. For bi-directional type having V_{RWM} of 30 volts and less , the I_r limit is double.
2. For parts without A , the V_{BR} is ± 10%.

Ratings and Characteristic Curves

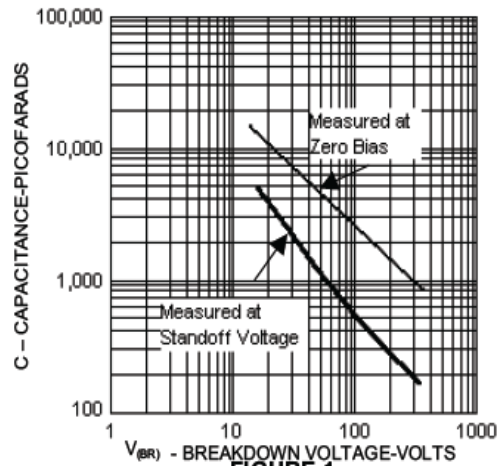


FIGURE 1
Typical Capacitance vs. Breakdown Voltage

Ordering Information

Part No.	Package	Packing Code	Packing
15KP17(C)A THRU 15KP280(C)A	P600	B02	200pcs/Bulk
15KP17(C)A THRU 15KP280(C)A	P600	A05	500pcs/Ammo
15KP17(C)A THRU 15KP280(C)A	P600	R08	800pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.