

### Features


- \* Low Forward Voltage Drop
- \* High Current Capability
- \* High Reliability
- \* High Surge Current Capability



RoHS  
COMPLIANT

### Package Outline Dimensions

DO-41:

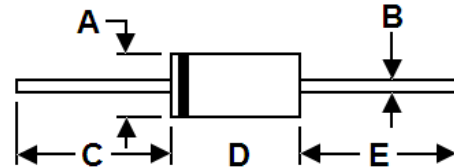

| DIM. | Unit (mm) |     | Unit (inch) |       |
|------|-----------|-----|-------------|-------|
|      | Min       | Max | Min         | Max   |
| A    | 2.0       | 2.7 | 0.078       | 0.107 |
| B    | 0.7       | 0.9 | 0.027       | 0.035 |
| C    | 25.4      | -   | 1.0         | -     |
| D    | 4.2       | 5.2 | 0.165       | 0.205 |
| E    | 25.4      | -   | 1.0         | -     |

### Mechanical Data

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any

### Maximum Ratings and Electrical Characteristics


Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Type Number   | Symbol        | 1N4933G     | 1N4934G | 1N4935G | 1N4936G | 1N4937G | Unit       |
|---|---------------|-------------|---------|---------|---------|---------|------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$     | 50          | 100     | 200     | 400     | 600     | V          |
| Maximum RMS Voltage   | $V_{RMS}$     | 35          | 70      | 140     | 280     | 420     | V          |
| Maximum D.C Blocking Voltage  | $V_{DC}$      | 50          | 100     | 200     | 400     | 600     | V          |
| Maximum Average Forward Rectified Current<br>.375" (9.5mm)Lead Length @ $T_A=55^\circ C$            | $I_{F(AV)}$   | 1.0         |         |         |         |         | A          |
| Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load(JEDEC method)    | $I_{FSM}$     | 30          |         |         |         |         | A          |
| Maximum Instantaneous Forward Voltage at 1.0A   | $V_F$         | 1.2         |         |         |         |         | V          |
| Maximum D.C Reverse Current @ $T_A=25^\circ C$<br>at Rated D.C Blocking Voltage @ $T_A=100^\circ C$ | $I_R$         | 5.0<br>100  |         |         |         |         | $\mu A$    |
| Maximum Reverse Recovery Time(Note1)  | $T_{rr}$      | 150         |         |         |         |         | nS         |
| Typical Junction Capacitance(Note2)   | $C_J$         | 15          |         |         |         |         | pF         |
| Operating and Storage Temperature Range   | $T_J/T_{STG}$ | -55 to +150 |         |         |         |         | $^\circ C$ |


Note:1、 Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$ . 2、 Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

### Ratings and Characteristic Curves


**FIG. 1 – TYPICAL FORWARD CURRENT DERATING CURVE**

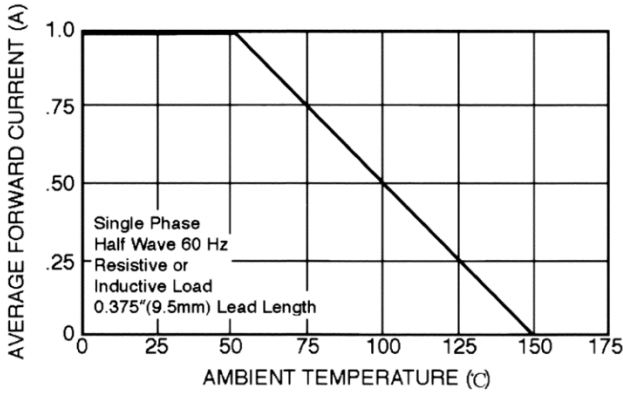


**FIG. 2 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

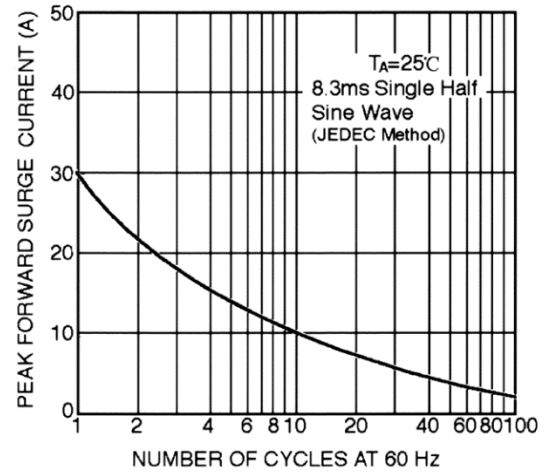



**FIG. 3 – TYPICAL FORWARD CHARACTERISTICS**

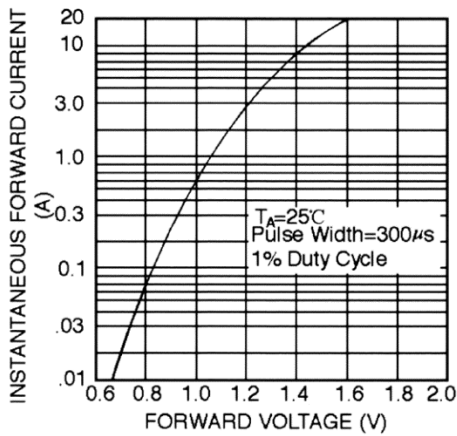

**FIG. 4 – TYPICAL JUNCTION CAPACITANCE**

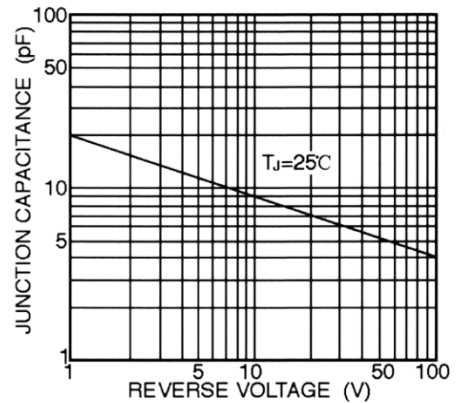

**FIG. 5 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS**

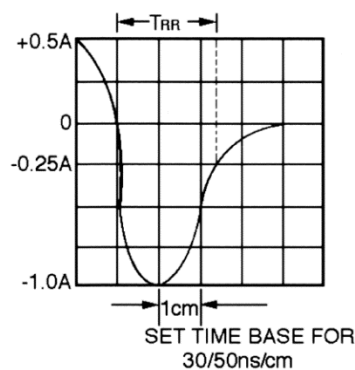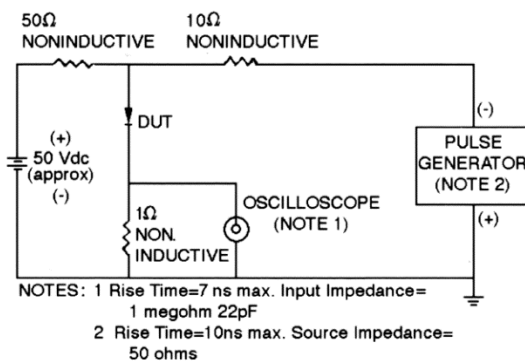



# 1N4933G THRU 1N4937G

1.0 Amp. Glass Passivated Fast Recovery Rectifiers

## Ordering Information

| Part No.        | Package | Packing           |
|-----------------|---------|-------------------|
| 1N4933G~1N4937G | DO-41   | 3K/AMMO box       |
| 1N4933G~1N4937G | DO-41   | 5K/AMMO box       |
| 1N4933G~1N4937G | DO-41   | 5K/13" Paper reel |
| 1N4933G~1N4937G | DO-41   | 1K/Bulk packing   |