

### Features


- \* Low Forward Voltage Drop
- \* High Current Capability
- \* High Reliability
- \* High Surge Current Capability



**RoHS**  
COMPLIANT

### Package Outline Dimensions

DO-201AD:

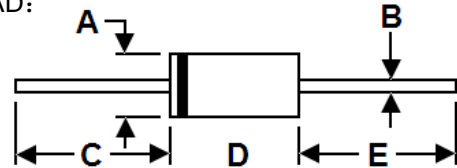

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.8	5.3	0.189	0.209
B	1.2	1.3	0.047	0.051
C	25.4	-	1.0	-
D	7.2	9.6	0.283	0.378
E	25.4	-	1.0	-

### Mechanical Data

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any

### Maximum Ratings and Electrical Characteristics


Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Type Number	Symbol	BY251	BY252	BY253	BY254	BY255	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	200	400	600	800	1300	V
Maximum RMS Voltage	$V_{RMS}$	140	280	420	560	910	V
Maximum D.C Blocking Voltage	$V_{DC}$	200	400	600	800	1300	V
Maximum Average Forward Rectified Current .375" (9.5mm)Lead Length @ $T_A=75^{\circ}C$	$I_{F(AV)}$	3.0					A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	150					A
Maximum Instantaneous Forward Voltage at 3.0A	$V_F$	1.0					V
Maximum D.C Reverse Current @ $T_A=25^{\circ}C$ at Rated D.C Blocking Voltage @ $T_A=100^{\circ}C$	$I_R$	5.0 100					$\mu A$
Typical Junction Capacitance(Note1)	$C_J$	50					pF
Typical Thermal Resistance(Note2)	$R_{\theta JA}$	18					$^{\circ}C/W$
Operating and Storage Temperature Range	$T_J/T_{STG}$	-55 to +125 / -55 to +150					$^{\circ}C$


Note:1、 Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.2、 Thermal Resistance From Junction to Ambient 0.375"(9.5mm) Lead Length.

### Ratings and Characteristic Curves


**FIG. 1 – TYPICAL FORWARD CURRENT DERATING CURVE**

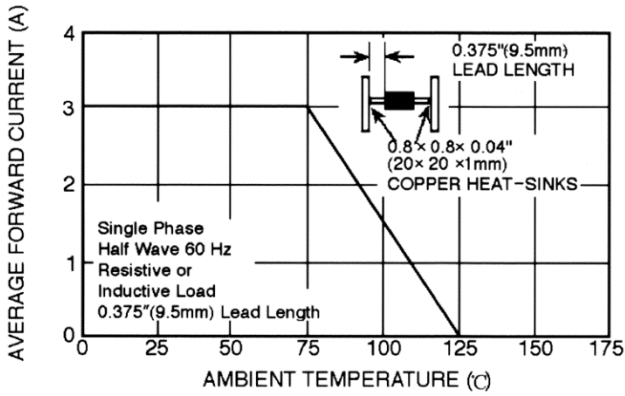


**FIG. 2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

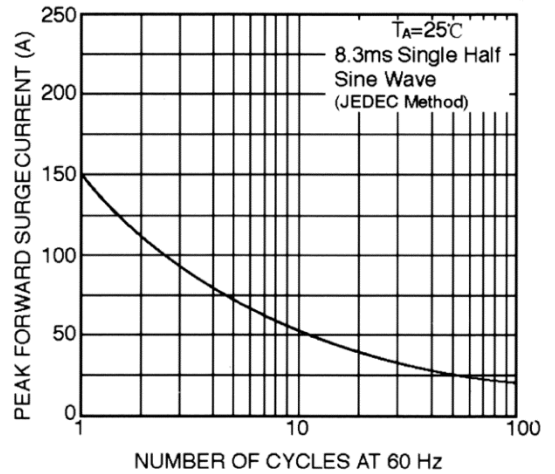


**FIG. 3 – TYPICAL FORWARD CHARACTERISTICS**

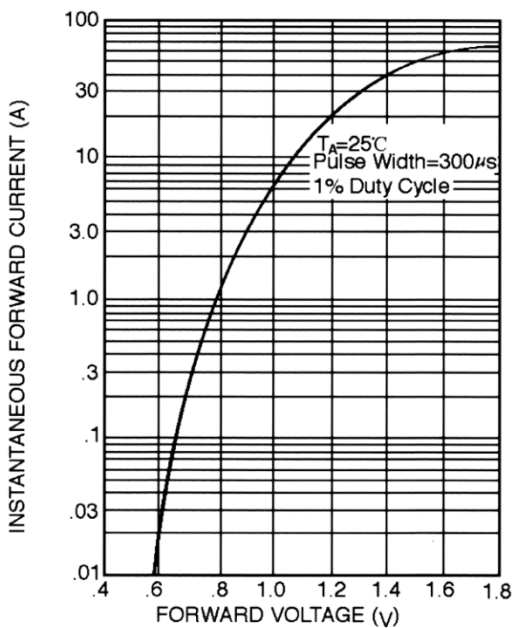

**FIG. 4 – TYPICAL REVERSE CHARACTERISTICS**

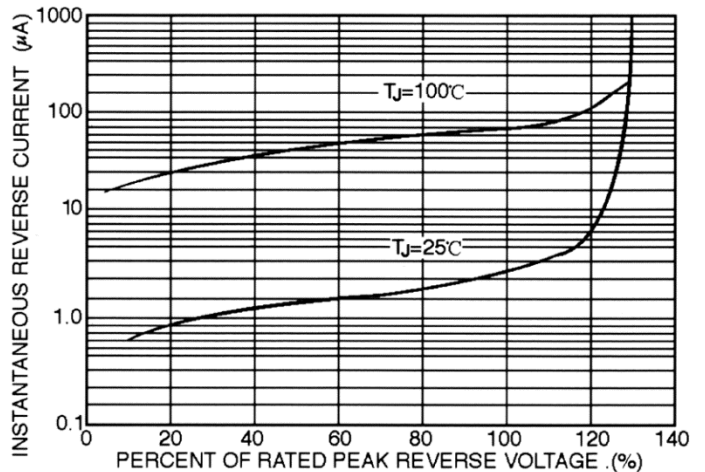

**FIG. 5 – TYPICAL JUNCTION CAPACITANCE**

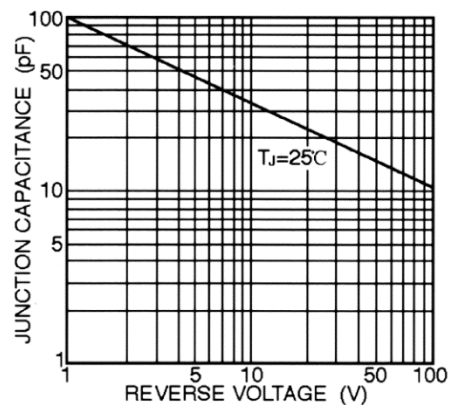



**BY251 THRU BY255**  
**3.0 Amps. Silicon Rectifiers**

**Ordering Information**

<b>Part No.</b>	<b>Package</b>	<b>Packing</b>
BY251~BY255	DO-201AD	0.8K/AMMO box
BY251~BY255	DO-201AD	1.2K/AMMO box
BY251~BY255	DO-201AD	1.2K/13" Paper reel
BY251~BY255	DO-201AD	0.5K/Bulk packing