


Features

- * Low Zener noise specified
- * Low Zener impedance
- * Low leakage current
- * Hermetically sealed glass package



RoHS
COMPLIANT

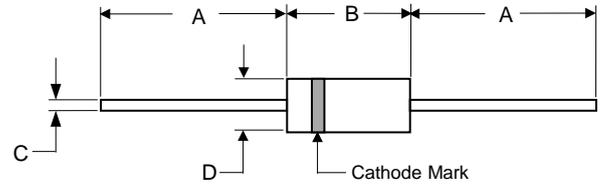

DO-35				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1.083	---	27.50	---
B	---	0.154	---	3.90
C	---	0.020	---	0.50
D	---	0.075	---	1.90

Mechanical Data

- * Case: Hermetically sealed glass case, DO-35.
- * Lead Material: Tinned copper clad steel.
- * Marking: Body painted, alphanumeric.
- * Polarity: Banded end is cathode.
- * Thermal Resistance: 200°C/W(Typical) junction to lead at 0.375-inches from body. Metallurgic ally bonded
DO-35's exhibit less than 100°C/Watt at zero distance from body.
- * Operating temperature: -65°C to +200°C;
- * Storage temperature: -65°C to +200°C.

Electrical Characteristics (T_A=25°C unless otherwise noted)

JEDEC Type No. (Note1)	Nominal Zener Voltage V _Z @I _{ZT} Volts (Note2)	Test Current I _{ZT} mAdc	Max Zener Impedance B-C-D Suffix Z _{ZT} @I _{ZT} OHMS (Note3)	Max Reverse Leakage Current			B-C-D Suffix Maximum DC Zener Current I _{ZM} mAdc (Note5)	B-C-D Suffix Max Noise Density at I _Z =250 μ A ND (micro-volts per square root cycle)	Regulation ΔV _Z Volts (Note6)	Low V _Z Current I _{ZL} mAdc
				IR μA dc (Note4)	VR-Volts					
					NON&A Suffix	B-C-D Suffix				
1N5518	3.3	20	26	5	0.9	1	115	0.5	0.9	2
1N5519	3.6	20	24	3	0.9	1	105	0.5	0.9	2
1N5520	3.9	20	22	1	0.9	1	98	0.5	0.85	2
1N5521	4.3	20	18	3	1	1.5	88	0.5	0.75	2
1N5522	4.7	10	22	2	1.5	2	81	0.5	0.6	1
1N5523	5.1	5	26	2	2	2.5	75	0.5	0.65	0.25
1N5524	5.6	3	30	2	3	3.5	68	1	0.3	0.25
1N5525	6.2	1	30	1	4.5	5	61	1	0.2	0.01
1N5526	6.8	1	30	1	5.5	6.2	56	1	0.1	0.01
1N5527	7.5	1	35	0.5	6	6.8	51	2	0.05	0.01
1N5528	8.2	1	40	0.5	6.5	7.5	46	4	0.05	0.01
1N5529	9.1	1	45	0.1	7	8.2	42	4	0.05	0.01
1N5530	10	1	60	0.05	8	9.1	38	4	0.1	0.01
1N5531	11	1	80	0.05	9	9.9	35	5	0.2	0.01
1N5532	12	1	90	0.05	9.5	10.8	32	10	0.2	0.01
1N5533	13	1	90	0.01	10.5	11.7	29	15	0.2	0.01
1N5534	14	1	100	0.01	11.5	12.6	27	20	0.2	0.01
1N5535	15	1	100	0.01	12.5	13.5	25	20	0.2	0.01
1N5536	16	1	100	0.01	13	14.4	24	20	0.2	0.01
1N5537	17	1	100	0.01	14	15.3	22	20	0.2	0.01
1N5538	18	1	100	0.01	15	16.2	21	20	0.2	0.01
1N5539	19	1	100	0.01	16	17.1	20	20	0.2	0.01
1N5540	20	1	100	0.01	17	18	19	20	0.2	0.01
1N5541	22	1	100	0.01	18	19.8	17	20	0.25	0.01
1N5542	24	1	100	0.01	20	21.6	16	20	0.3	0.01
1N5543	25	1	100	0.01	21	22.4	15	20	0.35	0.01
1N5544	28	1	100	0.01	23	25.2	14	20	0.4	0.01
1N5545	30	1	100	0.01	24	27	13	20	0.45	0.01
1N5546	33	1	100	0.01	28	29.7	12	20	0.5	0.01

Notes:

1. Tolerance and Voltage Designation: The JEDEC type numbers shown are ±20% with guaranteed limits for only V_Z, I_R and V_F. units with A suffix are ±10% with guaranteed limits for only V_Z, I_R and V_F. units with guaranteed limits for all six parameters are indicated by a B suffix for ±5% units, C suffix for ±2% and D suffix for ±1.0.
2. Zener(V_Z) Voltage Measurement: Nominal Zener voltage is measured with the device junction in thermal equilibrium with ambient temperature of 25°C.
3. Zener Impedance(Z_Z) Derivation: The Zener impedance is derived from the 60HZ ac voltage, which results when an ac current having an rms value equal to 10% of the dc Zener current (I_{ZT} is superimposed on I_{ZT}).
4. Reverse Leakage Current(I_R): Reverse leakage currents are guaranteed and are measured at VR as shown on the table.
5. Maximum Regulator Current(I_{ZM}): The maximum current shown is based on the maximum voltage of a 5.0% type unit; therefore, it applies only to the B suffix device. The actual I_{ZM} for any device may not exceed the value of 400 mill watts divided by the actual V_Z of the device.
6. Maximum Regulation Factor(ΔV_Z): ΔV_Z is the maximum difference between V_Z at I_{ZT} and V_Z at I_{ZL} measured with the device junction in thermal equilibrium.

Ratings and Characteristic Curves

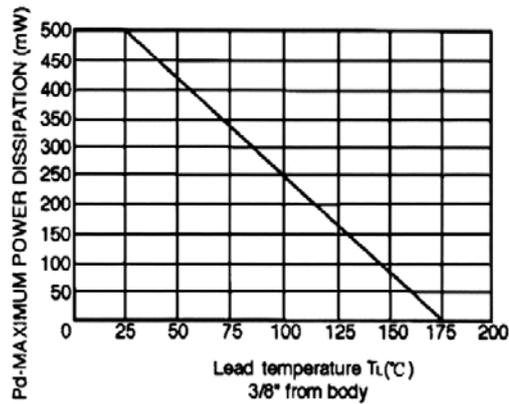


FIGURE 1 – POWER TEMPERATURE DERATING CURVE


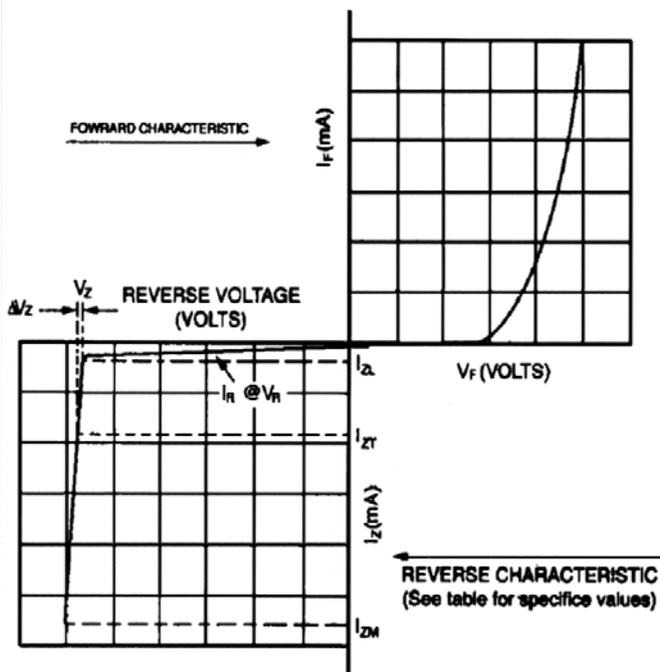


FIGURE 2 – ZENER DIODE CHARACTERISTICS AND SYMBOL IDENTIFICATION



ZENER VOLTAGE V_z
 FIGURE 3 – CAPACITANCE VS. V_z CURVE

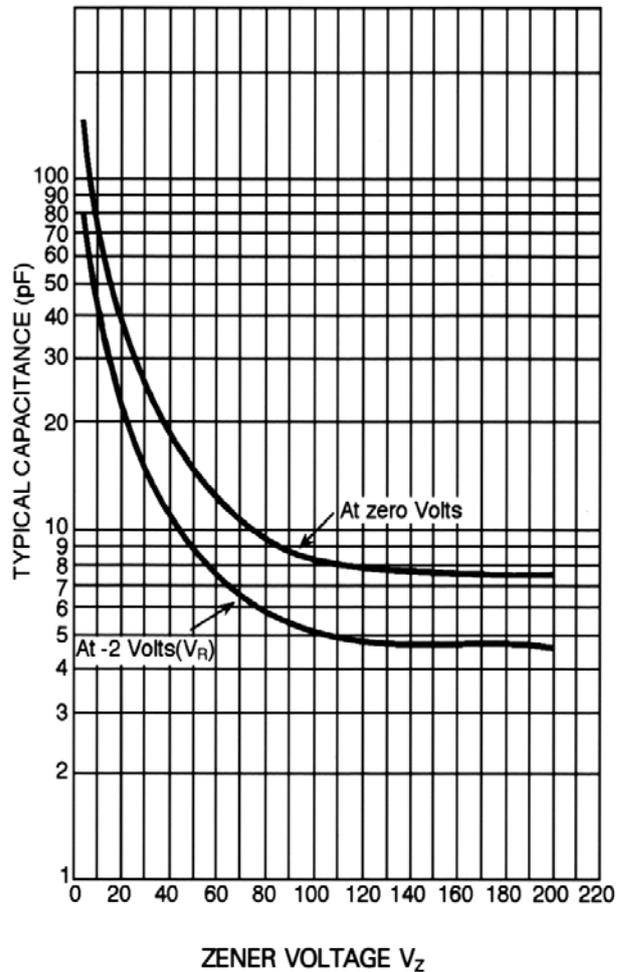

1N5518 THRU 1N5546

0.4W Low Voltage Avalanche Diodes

Ordering Information

Part No.	Package	Packing Code	Packing
1N5518 THRU 1N5546	DO-35	A50	5000pcs/Ammo

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.