


### Features

\* Zener Voltage Tolerance  $\pm 2\%$



**RoHS**  
COMPLIANT

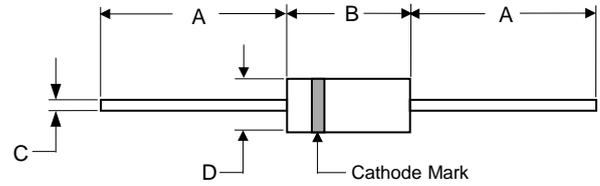

DO-35				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1.083	---	27.50	---
B	---	0.154	---	3.90
C	---	0.020	---	0.50
D	---	0.075	---	1.90

### Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Continuous Forward Current	$I_F$	250	mA
Power Dissipation	$P_{tot}$	500 <sup>1)</sup>	mW
Junction Temperature	$T_j$	175	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 175	$^\circ\text{C}$

Note:

1) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

### Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{thA}$	0.3 <sup>1)</sup>	K/mW
Forward Voltage at $I_F = 100\text{ mA}$	$V_F$	1.5	V

Note:

1) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

#### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Type	Zener Voltage Range <sup>1)</sup>			Dynamic Resistance		Reverse Leakage Current	
	V <sub>ZT</sub>		at I <sub>ZT</sub>	Z <sub>ZT</sub>	at I <sub>ZT</sub>	I <sub>R</sub>	at V <sub>R</sub>
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
BZX79B2V7	2.64	2.76	5	100	5	75	1
BZX79B3V0	2.94	3.06	5	95	5	50	1
BZX79B3V3	3.23	3.37	5	95	5	25	1
BZX79B3V6	3.52	3.68	5	90	5	15	1
BZX79B3V9	3.82	3.98	5	90	5	10	1
BZX79B4V3	4.21	4.39	5	90	5	5	1
BZX79B4V7	4.6	4.8	5	80	5	3	2
BZX79B5V1	4.99	5.21	5	60	5	2	2
BZX79B5V6	5.48	5.72	5	40	5	1	2
BZX79B6V2	6.07	6.33	5	10	5	3	4
BZX79B6V8	6.66	6.94	5	15	5	2	4
BZX79B7V5	7.35	7.65	5	15	5	1	5
BZX79B8V2	8.03	8.37	5	15	5	0.7	5
BZX79B9V1	8.91	9.29	5	15	5	0.5	6
BZX79B10	9.8	10.2	5	20	5	0.2	7
BZX79B11	10.78	11.22	5	20	5	0.1	8
BZX79B12	11.76	12.24	5	25	5	0.1	8
BZX79B13	12.74	13.26	5	30	5	0.1	8
BZX79B15	14.7	15.3	5	30	5	0.05	10.5
BZX79B16	15.68	16.32	5	40	5	0.05	11.2
BZX79B18	17.64	18.36	5	45	5	0.05	12.6
BZX79B20	19.6	20.4	5	55	5	0.05	14
BZX79B22	21.56	22.44	5	55	5	0.05	15.4
BZX79B24	23.52	24.48	5	70	5	0.05	16.8
BZX79B27	26.46	27.54	2	80	2	0.05	18.9
BZX79B30	29.4	30.6	2	80	2	0.05	21
BZX79B33	32.34	33.66	2	80	2	0.05	23.1
BZX79B36	35.28	36.72	2	90	2	0.05	25.2
BZX79B39	38.22	39.78	2	130	2	0.05	27.3
BZX79B43	42.14	43.86	2	150	2	0.05	30.1
BZX79B47	46.06	47.94	2	170	2	0.05	32.9
BZX79B51	49.98	52.02	2	180	2	0.05	35.7
BZX79B56	54.88	57.12	2	200	2	0.05	39.2
BZX79B62	60.76	63.24	2	215	2	0.05	43.4
BZX79B68	66.64	69.36	2	240	2	0.05	47.6
BZX79B75	73.5	76.5	2	255	2	0.05	52.5

Note:

1) Tested with pulses t<sub>p</sub> = 20 ms.



## BZX79B Series Silicon Planar Zener Diodes

---

### Ordering Information

---

Part No.	Package	Packing Code	Packing
BZX79B Series	DO-35	A50	5000pcs/Ammo

### Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.