


Features

- * Very Sharp Breakdown Characteristics
- * 500mW Power Dissipation on Ceramic PCB
- * Very Tight Tolerance on Vz
- * Ideally Suited for Automated Assembly Processes
- * Very Low Leakage Current
- * Lead Free Product



RoHS
COMPLIANT

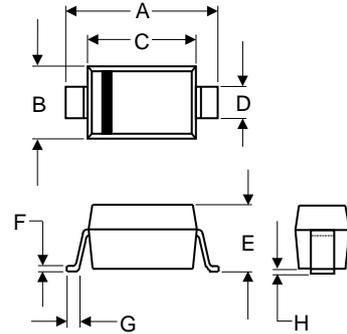

SOD-123				
DIM.	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.138	0.150	3.50	3.80
B	0.059	0.067	1.50	1.70
C	0.100	0.106	2.54	2.70
D	0.020	0.028	0.50	0.70
E	0.036	0.048	0.91	1.21
F	0.003	0.008	0.08	0.20
G	0.008	0.016	0.20	0.40
H	---	0.004	---	0.10

Mechanical Data

- * Case: SOD-123, Molded plastic
- * Terminals: Solderable per MIL-STD-202, Method 208
- * Polarity: Cathode Band

Maximum Ratings (TA=25°C unless otherwise noted)

Type Number	Symbol	Value	Units
Forward Voltage @ IF = 10mA	V _F	0.9	V
Power Dissipation (Note 1)	P _d	500	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	305	K/W
Operating and Storage Temperature Range	T _J / T _{STG}	-65 to +150	°C

Note: 1. Device mounted on ceramic PCB; 7.6mm x 9.4mm x 0.87mm with pad areas 25mm²



DDZ3V3A THRU DDZ43

Surface Mount Precision Zener Diodes

Electrical Characteristics (T_A=25°C unless otherwise noted)

Type Number	Marking Code	Zener Voltage Range (Note 4)			Maximum Zener Impedance (Note 5)			Maximum Reverse Current (Note 6)	
		V _Z @ I _{ZT}		I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R	@ V _R
		Min (V)	Max (V)	mA	Ω	mA	uA	V	
DDZ3V3A	GG	3.16	3.38	20	70	1000	1	20	1.0
DDZ3V6B	KH	3.600	3.845	20	60	1000	1	10	1.0
DDZ3V9B	KJ	3.89	4.16	20	50	1000	1	5	1.0
DDZ4V3B	KK	4.17	4.43	20	40	1000	1	5	1.0
DDZ4V7B	KL	4.55	4.80	20	25	900	1	5	1.0
DDZ5V1B	KM	4.94	5.20	20	17	480	1	5	1.5
DDZ5V6B	KN	5.45	5.73	20	11	400	1	0.5	2.5
DDZ6V2B	KO	5.96	6.27	20	7	150	1	0.5	4.0
DDZ6V8B	KP	6.49	6.83	20	5	150	0.5	0.1	5.0
DDZ6V8C	YP	6.66	7.01	20	5	150	0.5	0.1	5.0
DDZ7V5B	KQ	7.07	7.45	20	6	120	0.5	0.1	6.0
DDZ7V5C	YQ	7.29	7.67	20	6	120	0.5	0.1	6.0
DDZ8V2B	KR	7.78	8.19	20	8	120	0.5	0.1	6.5
DDZ8V2C	YR	8.03	8.45	20	8	120	0.5	0.1	6.5
DDZ9V1B	KS	8.57	9.01	20	8	120	0.5	0.1	7.0
DDZ9V1C	YS	8.83	9.30	20	8	120	0.5	0.1	7.0
DDZ10B	KT	9.41	9.90	20	8	120	0.5	0.1	8.0
DDZ10C	YT	9.70	10.20	20	8	120	0.5	0.1	8.0
DDZ11B	KU	10.50	11.05	10	10	120	0.5	0.1	8.4
DDZ11C	YU	10.82	11.38	10	10	120	0.5	0.1	8.4
DDZ12B	KV	11.44	12.03	10	12	110	0.5	0.1	9.1
DDZ12C	YV	11.74	12.35	10	12	110	0.5	0.1	9.1
DDZ13B	KW	12.55	13.21	10	14	110	0.5	0.1	10.0
DDZ14	GX	13.44	14.13	10	16	110	0.5	0.05	11.0
DDZ14B	KX	13.89	14.62	10	16	110	0.5	0.05	11.0
DDZ15	GY	14.80	15.57	10	18	150	0.5	0.05	12.0
DDZ16B	KY	15.25	16.04	10	18	150	0.5	0.05	12.0
DDZ16	YY	15.69	16.51	10	18	150	0.5	0.05	12.0
DDZ17	KZ	16.82	17.70	10	23	150	0.5	0.05	14.0
DDZ18C	YZ	17.42	18.33	10	23	150	0.5	0.05	14.0
DDZ19	ZJ	18.63	19.59	10	28	200	0.5	0.05	15.0
DDZ20C	PJ	19.23	20.22	10	28	200	0.5	0.05	15.0
DDZ21	ZK	20.64	21.71	5	30	200	0.5	0.05	17.0
DDZ22D	2K	21.52	22.63	5	30	200	0.5	0.05	17.0
DDZ23	ZL	22.61	23.77	5	35	200	0.5	0.05	19.0
DDZ24C	PL	23.12	24.31	5	35	200	0.5	0.05	19.0
DDZ26	ZM	24.97	26.26	5	45	250	0.5	0.05	21.0
DDZ27D	2M	26.29	27.64	5	45	250	0.5	0.05	21.0
DDZ28	ZN	27.70	29.13	5	55	250	0.5	0.05	23.0
DDZ30D	2N	29.02	30.51	5	55	250	0.5	0.05	23.0
DDZ31	ZO	30.32	31.88	5	65	250	0.5	0.05	25.0
DDZ33	RP	32.14	33.79	5	75	250	0.5	0.05	27.0
DDZ34	ZP	32.79	34.49	5	75	250	0.5	0.05	27.0
DDZ36	ZQ	35.36	37.19	5	85	250	0.5	0.05	30.0
DDZ39F	5Q	38.14	40.11	5	85	250	0.5	0.05	30.0
DDZ43	ZR	42.14	43.86	5	90	—	—	0.05	33.0

Notes: 4. The Zener voltage is measured 40ms after power is supplied.
5. f = 1kHz.
6. Short duration pulse test used to minimize self-heating effect.

Ratings and Characteristic Curves

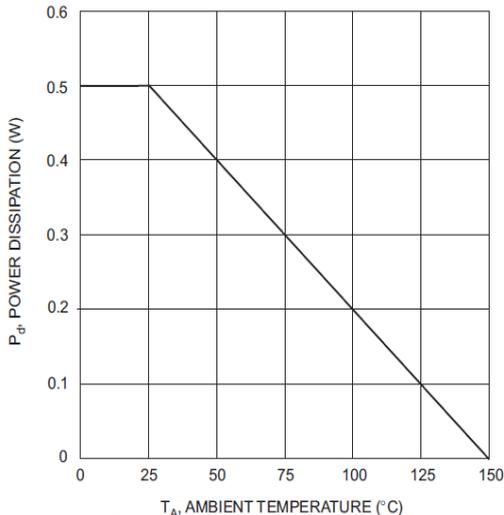


Fig. 1 Power Dissipation vs Ambient Temperature

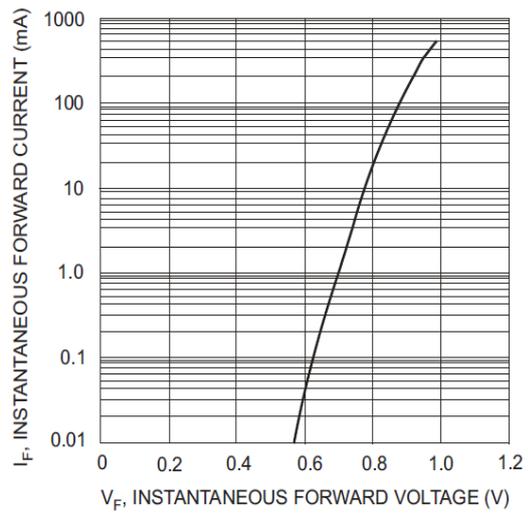


Fig. 2 Typical Forward Characteristics

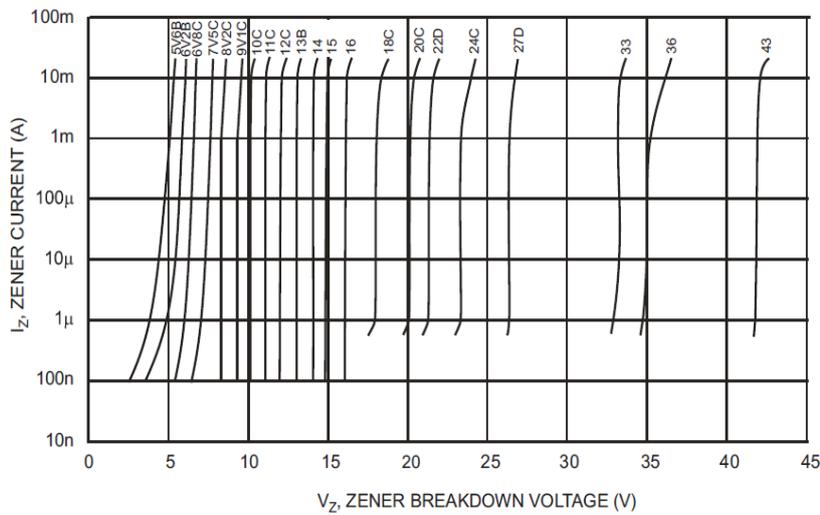


Fig. 3 Typical Reverse Characteristics

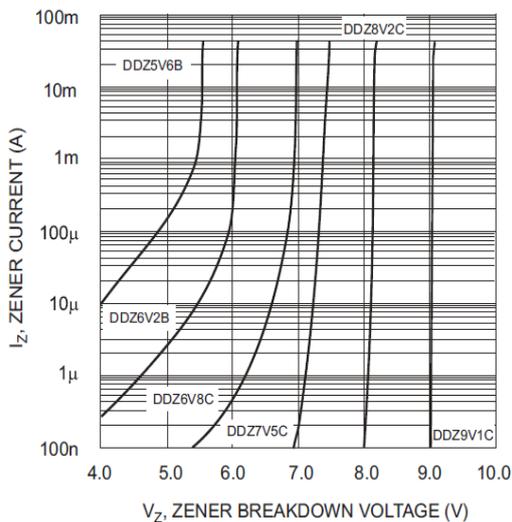


Fig. 4 Typical Reverse Characteristics, DDZ5V6B - DDZ9V1C

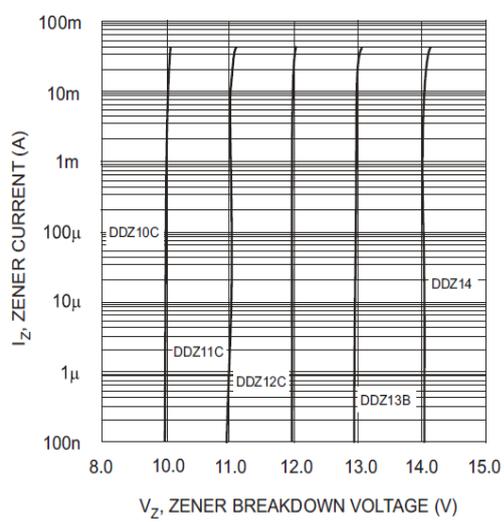


Fig. 5 Typical Reverse Characteristics, DDZ10C - DDZ14

Ratings and Characteristic Curves

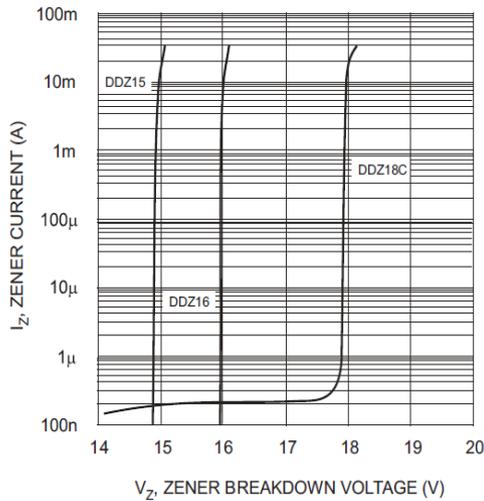


Fig. 6 Typical Reverse Characteristics, DDZ15 - DDZ18C

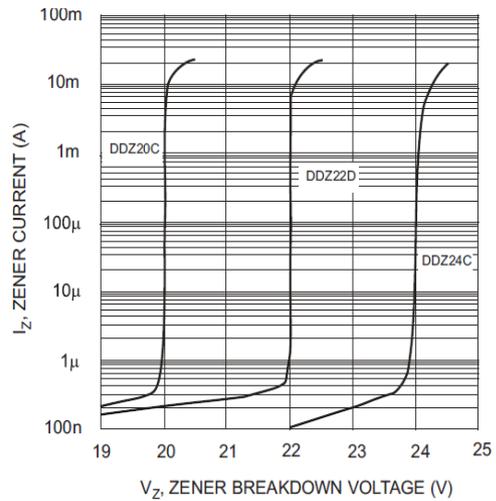


Fig. 7 Typical Reverse Characteristics, DDZ20C - DDZ24C

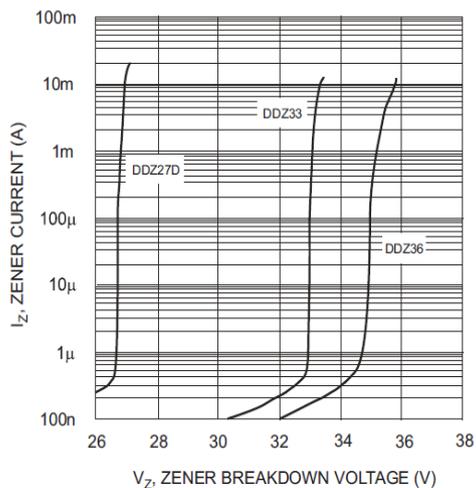


Fig. 8 Typical Reverse Characteristics, DDZ27D - DDZ36

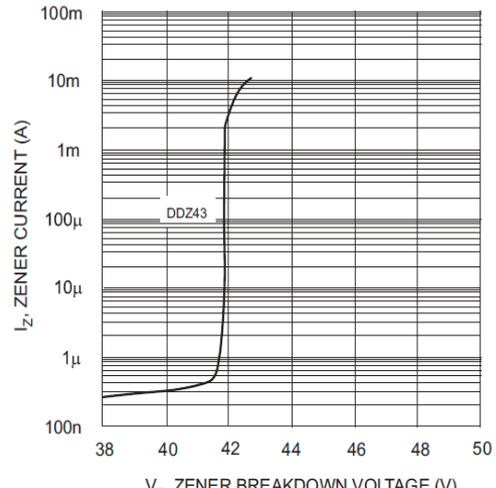


Fig. 9 Typical Reverse Characteristics, DDZ43

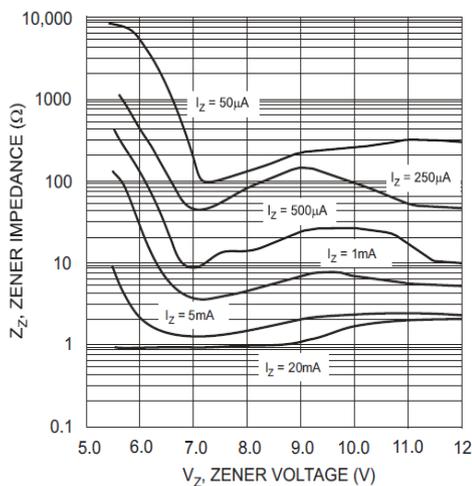


Fig. 10 Typical Zener Impedance Characteristics, DDZ5V6B - DDZ12C

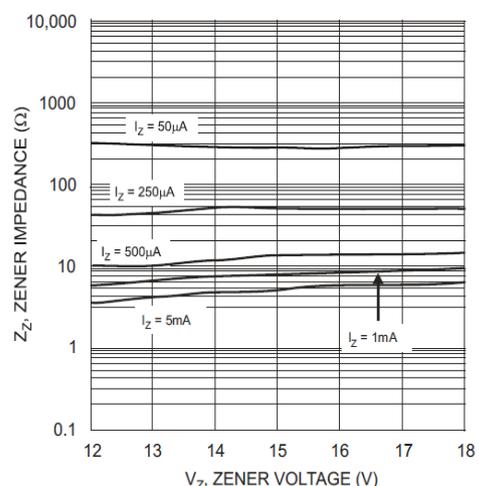


Fig. 11 Typical Zener Impedance Characteristics, DDZ12C - DDZ18C

Ratings and Characteristic Curves

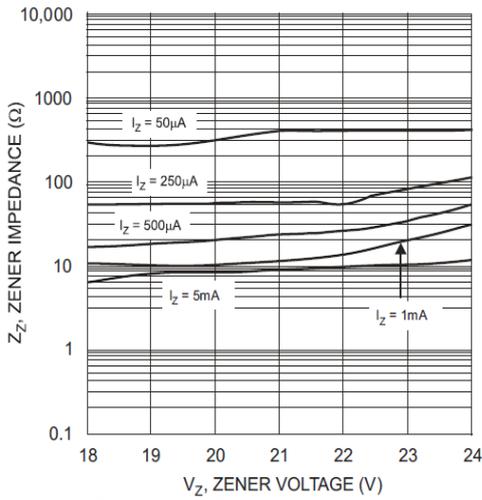


Fig. 12 Typical Zener Impedance Characteristics, DDZ18C - DDZ24C

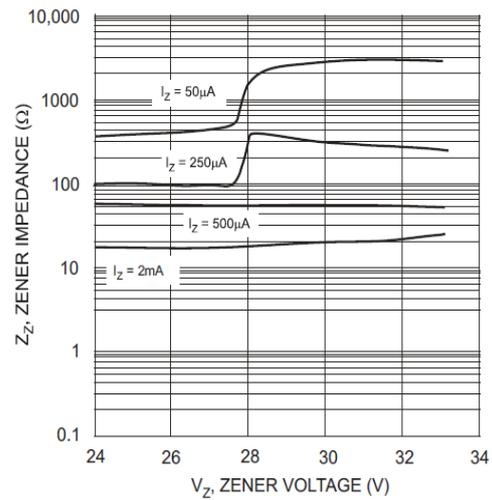


Fig. 13 Typical Zener Impedance Characteristics, DDZ24C - DDZ33

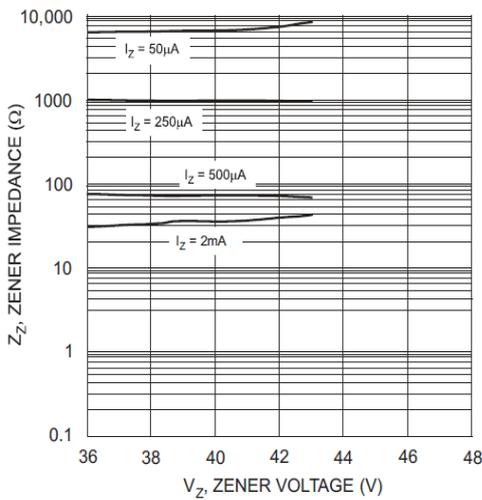


Fig. 14 Typical Zener Impedance Characteristics, DDZ36 - DDZ43

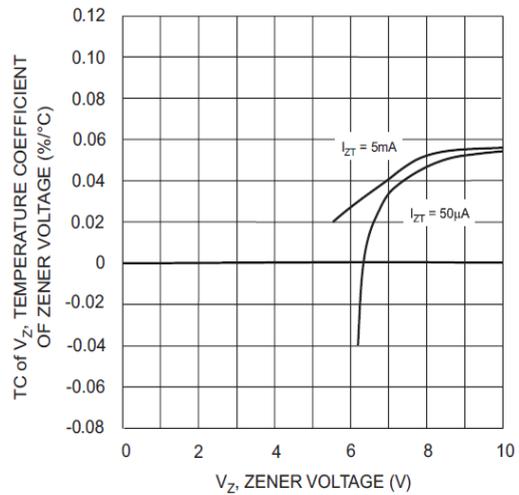


Fig. 15 Typical Temperature Coefficient of Zener Voltage vs. Zener Voltage, DDZ6V2B-DDZ10C

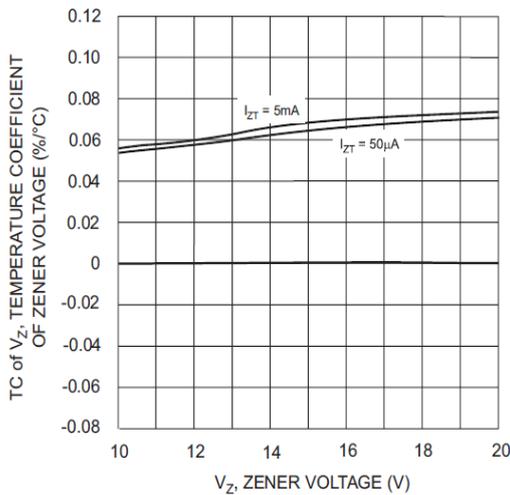


Fig. 16 Typical Temperature Coefficient of Zener Voltage vs. Zener Voltage, DDZ10C-DDZ20C

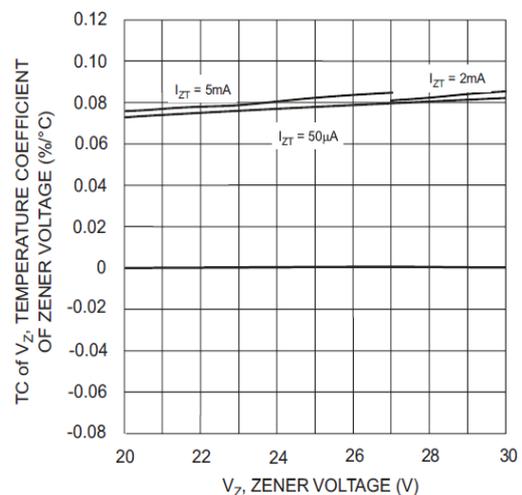


Fig. 17 Typical Temperature Coefficient of Zener Voltage, DDZ20C-DDZ30D

Ratings and Characteristic Curves

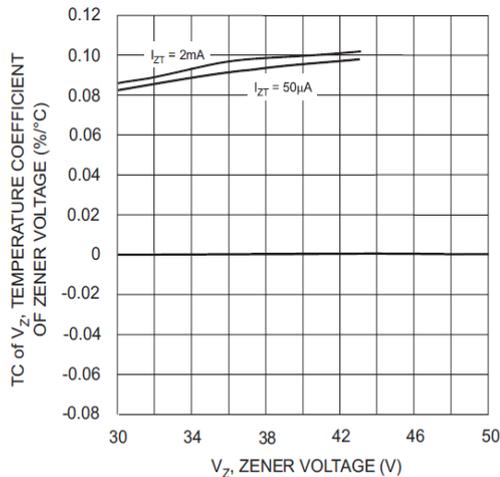


Fig. 18 Typical Temperature Coefficient of Zener Voltage, DDZ30D-DDZ43

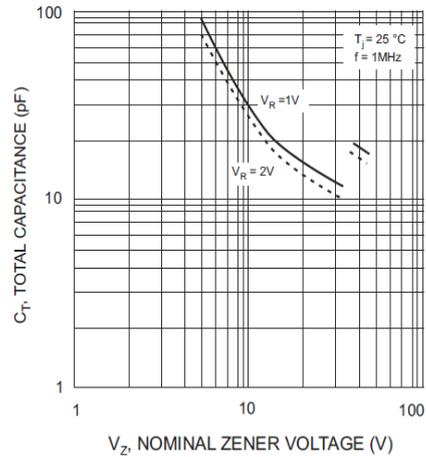


Fig. 19 Total Capacitance vs Nominal Zener Voltage

Ordering Information

Part No.	Package	Packing Code	Packing
DDZ3V3A THRU DDZ43	SOD-123	R30	3000pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.