


Features

- * For stabilized power supply
- * Low leakage, low zener impedance and maximum power dissipation of 500 mW are ideally suited for stabilized power supply, etc.
- * Wide spectrum from 1.6 V through 38 V of zener voltage provide flexible application.



RoHS
COMPLIANT

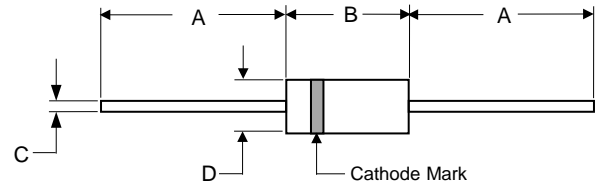

DO-34				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1.083	---	27.50	---
B	---	0.114	---	2.90
C	---	0.018	---	0.45
D	---	0.075	---	1.90

Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P _{tot}	500	mW
Junction Temperature	T _j	200	°C
Storage Temperature Range	T _{stg}	- 55 to + 175	°C

Electrical Characteristics (T_A=25°C unless otherwise noted) (V_F = 1 V Max. at I_F = 100 mA)

Type	Zener Voltage ¹⁾			Reverse Leakage Current		Dynamic Resistance	
	V _{ZT}		at I _{ZT}	I _R	at V _R	Z _{ZT}	at I _{ZT}
	Min. (V)	Max. (V)	(mA)	Max. (μA)	(V)	Max. (Ω)	(mA)
HZS2B1	1.9	2.1	5	5	0.5	100	5
HZS2B2	2	2.2	5	5	0.5	100	5
HZS2B3	2.1	2.3	5	5	0.5	100	5
HZS2C1	2.2	2.4	5	5	0.5	100	5
HZS2C2	2.3	2.5	5	5	0.5	100	5
HZS2C3	2.4	2.6	5	5	0.5	100	5
HZS3A1	2.5	2.7	5	5	0.5	100	5
HZS3A2	2.6	2.8	5	5	0.5	100	5
HZS3A3	2.7	2.9	5	5	0.5	100	5
HZS3B1	2.8	3	5	5	0.5	100	5
HZS3B2	2.9	3.1	5	5	0.5	100	5
HZS3B3	3	3.2	5	5	0.5	100	5
HZS3C1	3.1	3.3	5	5	0.5	100	5
HZS3C2	3.2	3.4	5	5	0.5	100	5
HZS3C3	3.3	3.5	5	5	0.5	100	5

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted) ($V_F = 1\text{ V Max. at } I_F = 100\text{ mA}$)

Type	Zener Voltage ¹⁾			Reverse Leakage Current		Dynamic Resistance	
	V_{ZT}		at I_{ZT}	I_R	at V_R	Z_{ZT}	at I_{ZT}
	Min. (V)	Max. (V)	(mA)	Max. (μA)	(V)	Max. (Ω)	(mA)
HZS4A1	3.4	3.6	5	5	1	100	5
HZS4A2	3.5	3.7	5	5	1	100	5
HZS4A3	3.6	3.8	5	5	1	100	5
HZS4B1	3.7	3.9	5	5	1	100	5
HZS4B2	3.8	4	5	5	1	100	5
HZS4B3	3.9	4.1	5	5	1	100	5
HZS4C1	4	4.2	5	5	1	100	5
HZS4C2	4.1	4.3	5	5	1	100	5
HZS4C3	4.2	4.4	5	5	1	100	5
HZS5A1	4.3	4.5	5	5	1.5	100	5
HZS5A2	4.4	4.6	5	5	1.5	100	5
HZS5A3	4.5	4.7	5	5	1.5	100	5
HZS5B1	4.6	4.8	5	5	1.5	100	5
HZS5B2	4.7	4.9	5	5	1.5	100	5
HZS5B3	4.8	5	5	5	1.5	100	5
HZS5C1	4.9	5.1	5	5	1.5	100	5
HZS5C2	5	5.2	5	5	1.5	100	5
HZS5C3	5.1	5.3	5	5	1.5	100	5
HZS6A1	5.2	5.5	5	5	2	40	5
HZS6A2	5.3	5.6	5	5	2	40	5
HZS6A3	5.4	5.7	5	5	2	40	5
HZS6B1	5.5	5.8	5	5	2	40	5
HZS6B2	5.6	5.9	5	5	2	40	5
HZS6B3	5.7	6	5	5	2	40	5
HZS6C1	5.8	6.1	5	5	2	40	5
HZS6C2	6	6.3	5	5	2	40	5
HZS6C3	6.1	6.4	5	5	2	40	5
HZS7A1	6.3	6.6	5	1	3.5	15	5
HZS7A2	6.4	6.7	5	1	3.5	15	5
HZS7A3	6.6	6.9	5	1	3.5	15	5
HZS7B1	6.7	7	5	1	3.5	15	5
HZS7B2	6.9	7.2	5	1	3.5	15	5
HZS7B3	7	7.3	5	1	3.5	15	5
HZS7C1	7.2	7.6	5	1	3.5	15	5
HZS7C2	7.3	7.7	5	1	3.5	15	5
HZS7C3	7.5	7.9	5	1	3.5	15	5
HZS9A1	7.7	8.1	5	1	5	20	5
HZS9A2	7.9	8.3	5	1	5	20	5
HZS9A3	8.1	8.5	5	1	5	20	5
HZS9B1	8.3	8.7	5	1	5	20	5
HZS9B2	8.5	8.9	5	1	5	20	5
HZS9B3	8.7	9.1	5	1	5	20	5
HZS9C1	8.9	9.3	5	1	5	20	5
HZS9C2	9.1	9.5	5	1	5	20	5
HZS9C3	9.3	9.7	5	1	5	20	5
HZS11A1	9.5	9.9	5	1	7.5	25	5
HZS11A2	9.7	10.1	5	1	7.5	25	5
HZS11A3	9.9	10.3	5	1	7.5	25	5



Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted) ($V_F = 1\text{ V Max. at } I_F = 100\text{ mA}$)

Type	Zener Voltage ¹⁾			Reverse Leakage Current		Dynamic Resistance	
	V_{ZT}		at I_{ZT}	I_R	at V_R	Z_{ZT}	at I_{ZT}
	Min. (V)	Max. (V)	(mA)	Max. (μA)	(V)	Max. (Ω)	(mA)
HZS11B1	10.2	10.6	5	1	7.5	25	5
HZS11B2	10.4	10.8	5	1	7.5	25	5
HZS11B3	10.7	11.1	5	1	7.5	25	5
HZS11C1	10.9	11.3	5	1	7.5	25	5
HZS11C2	11.1	11.6	5	1	7.5	25	5
HZS11C3	11.4	11.9	5	1	7.5	25	5
HZS12A1	11.6	12.1	5	1	9.5	35	5
HZS12A2	11.9	12.4	5	1	9.5	35	5
HZS12A3	12.2	12.7	5	1	9.5	35	5
HZS12B1	12.4	12.9	5	1	9.5	35	5
HZS12B2	12.6	13.1	5	1	9.5	35	5
HZS12B3	12.9	13.4	5	1	9.5	35	5
HZS12C1	13.2	13.7	5	1	9.5	35	5
HZS12C2	13.5	14	5	1	9.5	35	5
HZS12C3	13.8	14.3	5	1	9.5	35	5
HZS151	14.1	14.7	5	1	11	40	5
HZS152	14.5	15.1	5	1	11	40	5
HZS153	14.9	15.5	5	1	11	40	5
HZS161	15.3	15.9	5	1	12	45	5
HZS162	15.7	16.5	5	1	12	45	5
HZS163	16.3	17.1	5	1	12	45	5
HZS181	16.9	17.7	5	1	13	55	5
HZS182	17.5	18.3	5	1	13	55	5
HZS183	18.1	19	5	1	13	55	5
HZS201	18.8	19.7	2	1	15	60	2
HZS202	19.5	20.4	2	1	15	60	2
HZS203	20.2	21.1	2	1	15	60	2
HZS221	20.9	21.9	2	1	17	65	2
HZS222	21.6	22.6	2	1	17	65	2
HZS223	22.3	23.3	2	1	17	65	2
HZS241	22.9	24	2	1	19	70	2
HZS242	23.6	24.7	2	1	19	70	2
HZS243	24.3	25.5	2	1	19	70	2
HZS271	25.2	26.6	2	1	21	80	2
HZS272	26.2	27.6	2	1	21	80	2
HZS273	27.2	28.6	2	1	21	80	2
HZS301	28.2	29.6	2	1	23	100	2
HZS302	29.2	30.6	2	1	23	100	2
HZS303	30.2	31.6	2	1	23	100	2
HZS331	31.2	32.6	2	1	25	120	2
HZS332	32.2	33.6	2	1	25	120	2
HZS333	33.2	34.6	2	1	25	120	2
HZS361	34.2	35.7	2	1	27	140	2
HZS362	35.3	36.8	2	1	27	140	2
HZS363	36.4	38	2	1	27	140	2

Note:

1) Tested with pulses $t_p = 20\text{ ms}$.

Ratings and Characteristic Curves

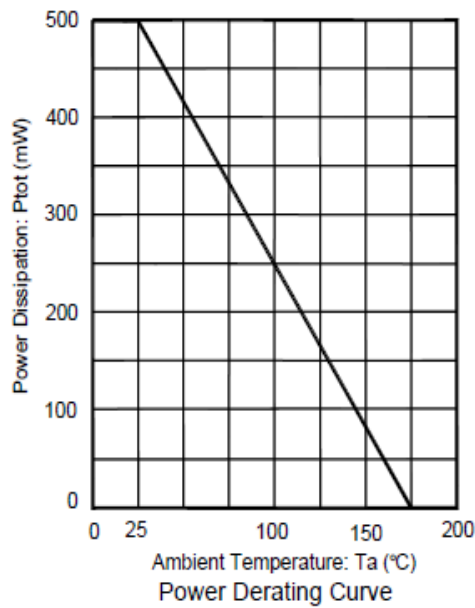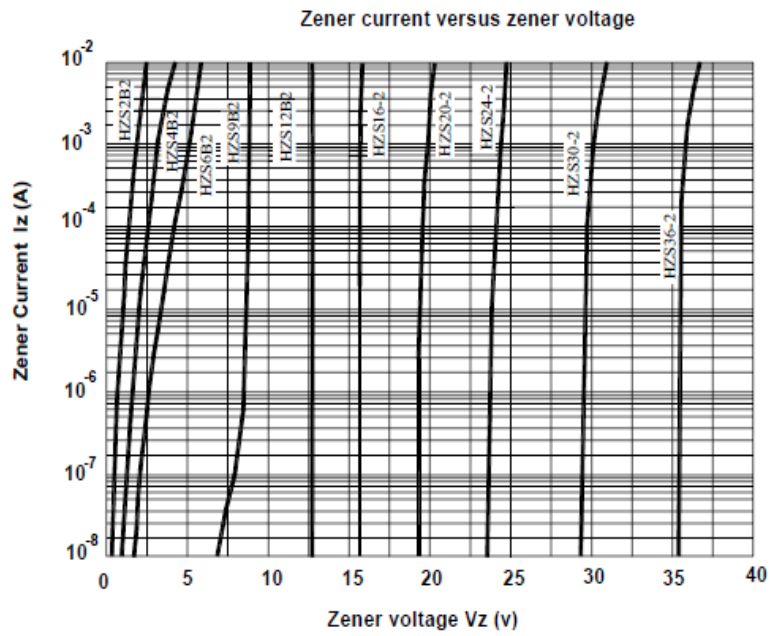



HZS Series

Silicon Epitaxial Planar Zener Diodes

Ordering Information

Part No.	Package	Packing Code	Packing
HZS Series	DO-34	A50	5000pcs/Ammo

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.