


Features

- * Standard zener voltage tolerance is $\pm 20\%$.
- * Add suffix "A" for $\pm 10\%$ tolerance, suffix "B" for $\pm 5\%$ tolerance and suffix "C" for $\pm 2\%$ tolerance.
- * Other tolerance, non standard and higher zener voltages are upon request.



RoHS
COMPLIANT

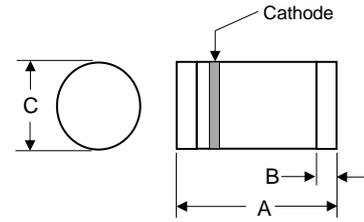

LL-34				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.134	0.142	3.40	3.60
B	0.008	0.016	0.20	0.40
C	0.055	0.059	1.40	1.50

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P _{tot}	500 ¹⁾	mW
Junction Temperature	T _j	175	°C
Storage Temperature Range	T _{stg}	- 65 to + 175	°C

Note:1) Valid provided that electrodes are kept at ambient temperature.

Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	R _{thA}	0.3 ¹⁾	K/mW
Forward Voltage at I _F = 200 mA	V _F	1.1	V

Note:1) Valid provided that electrodes are kept at ambient temperature


Electrical Characteristics (T_A=25°C unless otherwise noted)

Type	Zener Voltage Range ¹⁾				Dynamic Resistance			Reverse Current	
	V _{Znom}	V _{ZT}		at I _{ZT}	Z _{TT}	Z _{ZK}	at I _{ZK}	I _R	at V _R
	(V)	Min. (V)	Max. (V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMM5221B	2.4	2.28	2.52	20	30	1200	0.25	100	1
ZMM5222B	2.5	2.38	2.62	20	30	1250	0.25	100	1
ZMM5223B	2.7	2.57	2.83	20	30	1300	0.25	75	1
ZMM5224B	2.8	2.66	2.94	20	30	1400	0.25	75	1
ZMM5225B	3	2.85	3.15	20	29	1600	0.25	50	1
ZMM5226B	3.3	3.14	3.46	20	28	1600	0.25	25	1
ZMM5227B	3.6	3.42	3.78	20	24	1700	0.25	15	1
ZMM5228B	3.9	3.71	4.09	20	23	1900	0.25	10	1
ZMM5229B	4.3	4.09	4.51	20	22	2000	0.25	5	1
ZMM5230B	4.7	4.47	4.93	20	19	1900	0.25	5	2
ZMM5231B	5.1	4.85	5.35	20	17	1600	0.25	5	2
ZMM5232B	5.6	5.32	5.88	20	11	1600	0.25	5	3
ZMM5233B	6	5.7	6.3	20	7	1600	0.25	5	3.5
ZMM5234B	6.2	5.89	6.51	20	7	1000	0.25	5	4
ZMM5235B	6.8	6.46	7.14	20	5	750	0.25	3	5
ZMM5236B	7.5	7.13	7.87	20	6	500	0.25	3	6
ZMM5237B	8.2	7.79	8.61	20	8	500	0.25	3	6.5
ZMM5238B	8.7	8.27	9.13	20	8	600	0.25	3	6.5
ZMM5239B	9.1	8.65	9.55	20	10	600	0.25	3	7
ZMM5240B	10	9.5	10.5	20	17	600	0.25	3	8
ZMM5241B	11	10.45	11.55	20	22	600	0.25	2	8.4
ZMM5242B	12	11.4	12.6	20	30	600	0.25	1	9.1
ZMM5243B	13	12.35	13.65	9.5	13	600	0.25	0.5	9.9
ZMM5244B	14	13.3	14.7	9	15	600	0.25	0.1	10
ZMM5245B	15	14.25	15.75	8.5	16	600	0.25	0.1	11
ZMM5246B	16	15.2	16.8	7.8	17	600	0.25	0.1	12
ZMM5247B	17	16.15	17.85	7.4	19	600	0.25	0.1	13
ZMM5248B	18	17.1	18.9	7	21	600	0.25	0.1	14
ZMM5249B	19	18.05	19.95	6.6	23	600	0.25	0.1	14
ZMM5250B	20	19	21	6.2	25	600	0.25	0.1	15
ZMM5251B	22	20.9	23.1	5.6	29	600	0.25	0.1	17
ZMM5252B	24	22.8	25.2	5.2	33	600	0.25	0.1	18
ZMM5253B	25	23.75	26.25	5	35	600	0.25	0.1	19
ZMM5254B	27	25.65	28.35	4.6	41	600	0.25	0.1	21
ZMM5255B	28	26.6	29.4	4.4	44	600	0.25	0.1	21
ZMM5256B	30	28.5	31.5	4.2	49	600	0.25	0.1	23
ZMM5257B	33	31.35	34.65	3.8	58	700	0.25	0.1	25
ZMM5258B	36	34.2	37.8	3.4	70	700	0.25	0.1	27
ZMM5259B	39	37.05	40.95	3.2	80	800	0.25	0.1	30
ZMM5260B	43	40.85	45.15	3	93	900	0.25	0.1	33
ZMM5261B	47	44.65	49.35	2.7	105	1000	0.25	0.1	36
ZMM5262B	51	48.45	53.55	2.5	125	1100	0.25	0.1	39
ZMM5263B	56	53.2	58.8	2.2	150	1300	0.25	0.1	45
ZMM5264B	60	57	63	2.1	170	1400	0.25	0.1	46
ZMM5265B	62	58.9	65.1	2	185	1400	0.25	0.1	47
ZMM5266B	68	64.6	71.4	1.8	230	1600	0.25	0.1	52
ZMM5267B	75	71.25	78.75	1.7	270	1700	0.25	0.1	56

Note:

1) Tested with pulses t_p = 20 ms.

Ratings and Characteristic Curves

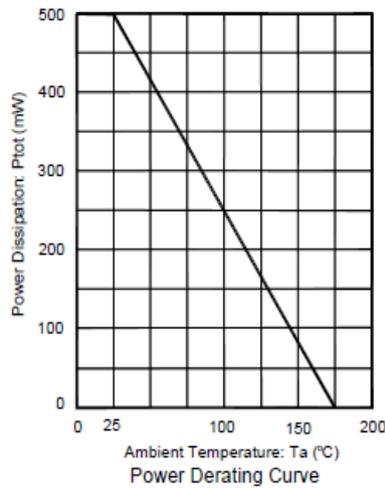

Ordering Information

Part No.	Package	Packing Code	Packing
ZMM1B THRU ZMM75B	LL-34	R25	2500pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.