


### Features

- \* For surface mounted application
- \* Low Profile Package
- \* Glass Passivated Chip Junction
- \* High Temp Soldering: 260°C for 10seconds at Terminals
- \* Superfast Recovery Times



RoHS  
COMPLIANT

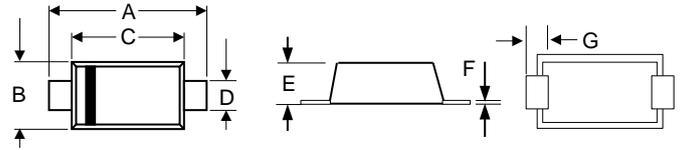

DIM.	SMAF			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.173	0.193	4.40	4.90
B	0.094	0.106	2.40	2.70
C	0.130	0.146	3.30	3.70
D	0.051	0.063	1.30	1.60
E	0.035	0.043	0.90	1.10
F	0.005	0.008	0.12	0.20
G	0.031	0.047	0.80	1.20

### Mechanical Data

- \* Case: SMAF Molded plastic
- \* Terminals: Solderable per MIL-STD-750, Method 2026
- \* Polarity: Indicated by cathode band

### Maximum Ratings and Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Type Number	Symbols	US3AAF	US3BAF	US3DAF	US3GAF	US3JAF	US3KAF	US3MAF	Unit	
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V	
Maximum D.C Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	3							A	
Peak Forward Surge Current, 8.3ms single half sine-wave	I <sub>FSM</sub>	100							A	
Maximum Instantaneous Forward Voltage at 3.0A	V <sub>F</sub>	1.0		1.3		1.7			V	
Maximum D.C Reverse Current @ T <sub>J</sub> =25°C at Rated D.C Blocking Voltage @ T <sub>J</sub> =125°C	I <sub>R</sub>	5 100							μA	
Maximum Reverse Recovery Time (Note1)	T <sub>rr</sub>	50				75				nS
Typical thermal resistance (Note2)	R <sub>θJA</sub> R <sub>θJC</sub>	50 16							°C/W	
Operating and Storage Temperature Range	T <sub>J</sub> /T <sub>STG</sub>	-55 to +150							°C	

Note 1: Reverse Recovery Test Conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

Note 2: P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

### Ratings and Characteristic Curves

Fig.1 Maximum Average Forward Current Rating

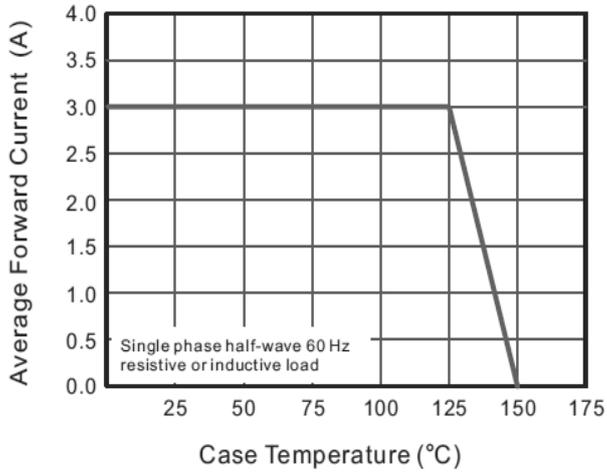


Fig.2 Typical Reverse Characteristics

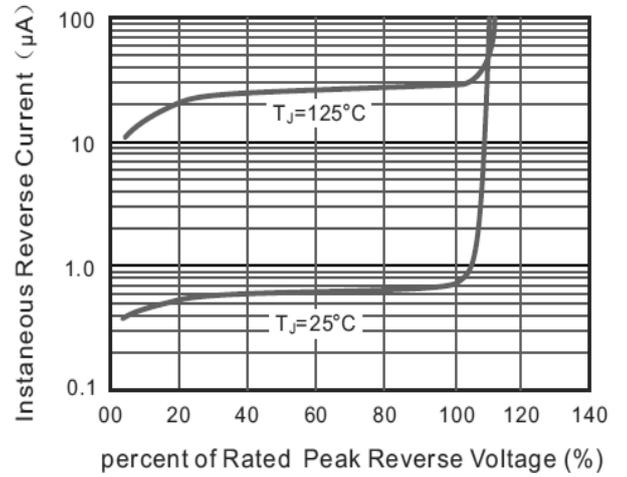


Fig.3 Typical Forward Characteristics


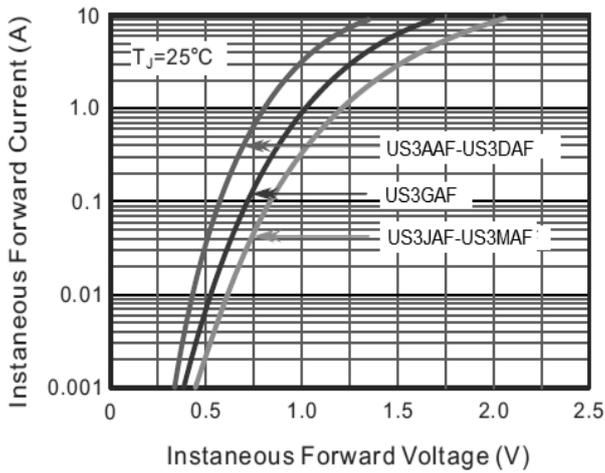


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current



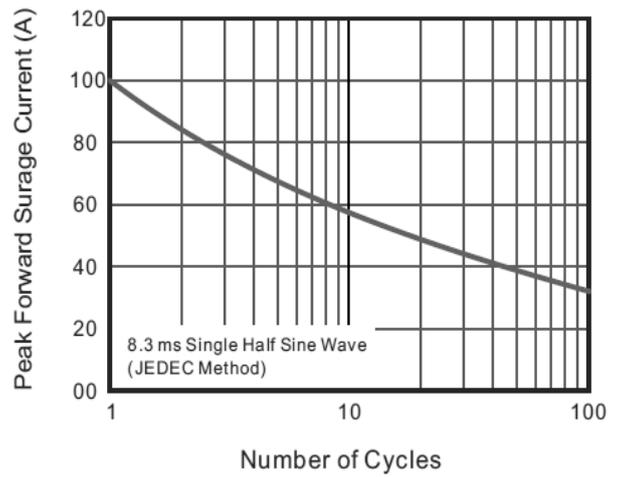

# US3AAF THRU US3MAF

3.0 Amp. Surface Mount Glass Passivated High Efficient Rectifiers

## Ordering Information

Part No.	Package	Packing Code	Packing
US3AAF THRU US3MAF	SMAF	R30	3000pcs/Reel

### Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors in accuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.